



# Lecture 2: Noises in Photoconductors

**Additional Reading: Yariv 10.3-10.5 or Chuang 15.1.3**

**Instructor: Ming C. Wu**

**University of California, Berkeley  
Electrical Engineering and Computer Sciences Dept.**



# Poisson Distribution

Poisson distribution:

a given event occurring in any time interval is distributed uniformly over the interval.

The probability of  $n$  electrons arriving in a period  $T$ : is

$$p(n) = \frac{\bar{n}^n e^{-\bar{n}}}{n!}$$

where  $\bar{n}$  is the average number of electrons arriving in  $T$

Properties of Poisson Distribution:

$$\text{Mean} = \bar{n}$$

$$\text{Variance} = \bar{n}$$



# Spectral Density Function

Random variable  $i(t)$  consists of a large number of individual events (e.g., single-electron photocurrent) at random time:

$$i(t) = \sum_{i=1}^{N_T} f(t - t_i), \quad 0 \leq t \leq T$$

Fourier transform: 
$$I_T(\omega) = \sum_{i=1}^{N_T} F_i(\omega)$$

$$F_i(\omega) = \frac{1}{2\pi} \int_{-\infty}^{\infty} f(t - t_i) e^{-i\omega t} dt = \frac{e^{-i\omega t_i}}{2\pi} \int_{-\infty}^{\infty} f(t) e^{-i\omega t} dt = e^{-i\omega t_i} F(\omega)$$

$$\langle |I_T(\omega)|^2 \rangle = \left\langle |F(\omega)|^2 \left\{ N_T + \sum_{i=1}^{N_T} \sum_{j=1}^{N_T} e^{-i\omega(t_i - t_j)} \right\} \right\rangle = \overline{N_T} |F(\omega)|^2 = \overline{NT} |F(\omega)|^2$$

$\overline{N}$ : average rate of electron arrival


Spectral density function: 
$$S(\nu) = \lim_{T \rightarrow \infty} \frac{8\pi^2 |I_T(2\pi\nu)|^2}{T} = 8\pi^2 \overline{N} |F(2\pi\nu)|^2$$



# Shot Noise

Shot Noise: Noise current arising from random generation and flow of mobile charge carriers.

Current pulse due to a single electron moving at  $v(t)$ :

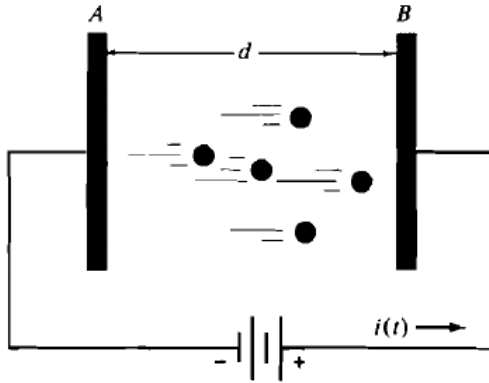

$$i_e(t) = \frac{ev(t)}{d}$$

$$\text{Fourier transform: } F(\omega) = \frac{1}{2\pi} \frac{e}{d} \int_0^{t_a} v(t) e^{-i\omega t} dt$$

$$t_a : \text{arrival time, } x(0) = 0, \quad x(t_a) = d,$$

$$\text{Small transit time } t_a, \omega t_a \ll 1 \rightarrow e^{-i\omega t} \sim 1$$

$$F(\omega) = \frac{1}{2\pi} \frac{e}{d} \int_0^{t_a} \frac{dx}{dt} \cdot 1 \cdot dt = \frac{1}{2\pi} \frac{e}{d} \int_0^d dx = \frac{e}{2\pi}$$


$$S(v) = 8\pi^2 \bar{N} \left( \frac{e}{2\pi} \right)^2 = 2e\bar{I}$$

$$\bar{I} = e\bar{N}$$

$$\overline{i_N^2(v)} = S(v)dv = 2e\bar{I}dv$$



# Thermal Noise (Johnson Noise)

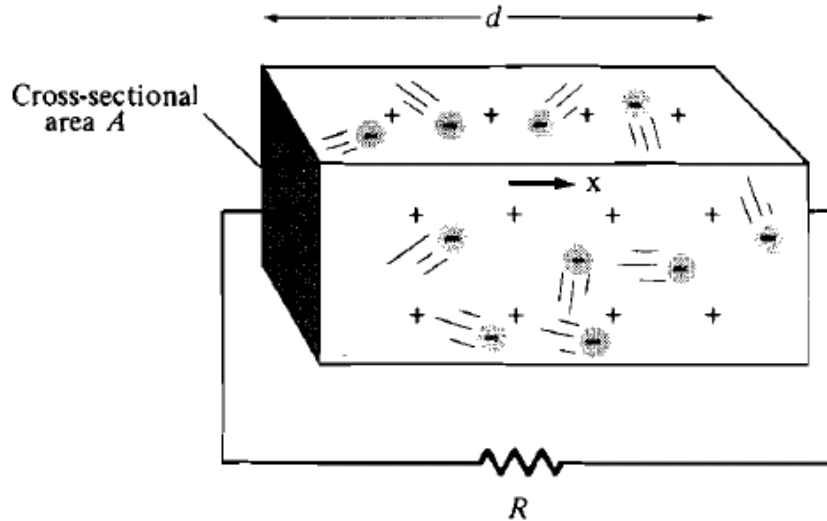

- Fluctuation in the voltage across a dissipative circuit element (resistor)
- Caused by thermal motion of charged carriers



# Thermal Noise Derivation

Consider two resistors connected by a lossless transmission line of length  $L$ :

voltage wave:  $v(t) = A \cos(\omega t \pm kz)$

Assume periodic condition:  $kL = 2m\pi$

Mode density:  $\rho(\nu) = \frac{L}{c}$

Power flow:  $P = \frac{\text{Energy}}{\text{Transit Time}}$




$$P = \frac{1}{L/c} \left( \frac{L}{c} \Delta\nu \right) \left( \frac{h\nu}{e^{h\nu/k_B T} - 1} \right) = \frac{h\nu \Delta\nu}{e^{h\nu/k_B T} - 1}$$

$h\nu / k_B T \ll 1$

$$P = k_B T \Delta\nu = \left( \overline{v_N^2} \left( \frac{R}{R+R} \right)^2 \right) \frac{1}{R} = \left( \overline{i_N^2} \left( \frac{R}{R+R} \right)^2 \right) R$$

Equivalent mean square noise voltage:  $\overline{v_N^2} = 4k_B T R \Delta\nu$

Equivalent mean square noise current:  $\overline{i_N^2} = \frac{4k_B T \Delta\nu}{R}$

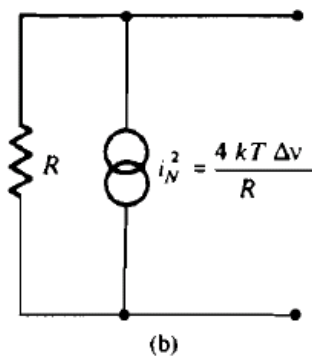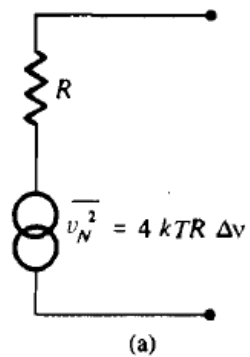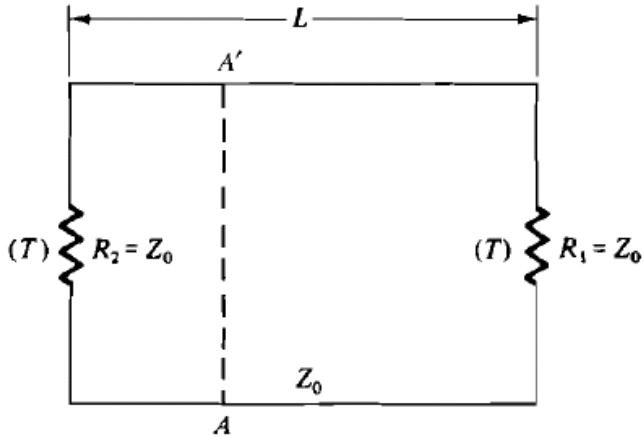



# Noise in p-i-n Photodiode

Noises in p-i-n photodiodes: shot noise and thermal noise

$$\overline{i_N^2(v)} = \overline{i_{N,shot}^2(v)} + \overline{i_{N,thermal}^2(v)} = 2e\bar{I}dv + \frac{4k_B T \Delta v}{R}$$

Signal:

$$i_S^2(v) = \bar{I}^2$$

Signal to noise ratio (SNR):

$$SNR = \frac{\bar{I}^2}{2e\bar{I}dv + \frac{4k_B T \Delta v}{R}}$$

Note that the SNR improves with increasing average photocurrent  $\bar{I}$